



# Insignia

## RANGE INTRODUCTION

Insignia is a range of wiring devices that combine function and style. The design is smooth, clean and the products are very slim – in fact just 1.5mm. Insignia is the choice in modern, contemporary or traditional interiors where style and detail are the desired effect.

With Insignia comes unrivalled safety. Utilising MK's 3-pin operated safety shutter, that prevents misuse and unsafe access to live circuitry, Insignia offers the user the peace of mind and comfort that they have the safest range of wiring devices available installed in their surroundings.

### HOW TO SPECIFY

A metal flatplate flush mounting range of wiring accessories, to be made in the UK. Frontplate to have a maximum 1.5mm profile and subtle 5mm radius rounded corners. Fixing screws to be flathead design, flush fitting & coloured to match the frontplate. Cable connections must be upward facing with easy to identify white markings on a dark background, grouped in a straight line with captive terminal screws for ease of installation. All sockets to have a 3 pin operated shutter safety mechanism and double pole switching, with the contacts designed such that the neutral makes before and breaks after the live pole for improved safety. Switches to be large and concave with a minimum 3mm contact gap with a positive 'click' to denote successful operation.

### FEATURES & BENEFITS

#### SLIM PROFILE FRONTPLATES OF ONLY 1.5MM WITH MATCHING FLAT HEAD SCREWS THROUGHOUT

A clean and practical range of products that complement the finest interiors.

#### TOTAL SAFETY

3-pin operated "child resistant shutter system", which is designed to inhibit access to the electricity supply, unless all 3 pins of a standard British 13A plug are in position.


#### COMPREHENSIVE RANGE OF SOCKETS, SWITCHES AND MODULAR ANCILLARY PRODUCTS

Mean that whatever the application, the Insignia range has a wiring device to suit.

#### 13 STANDARD HIGH QUALITY FINISHES WITH A MADE-TO-ORDER SERVICE

Allows designers the flexibility to provide the finish of their choice.

In addition to the wide choice of standard finishes, a made-to-order service gives designers the ability to match almost any RAL colour required.

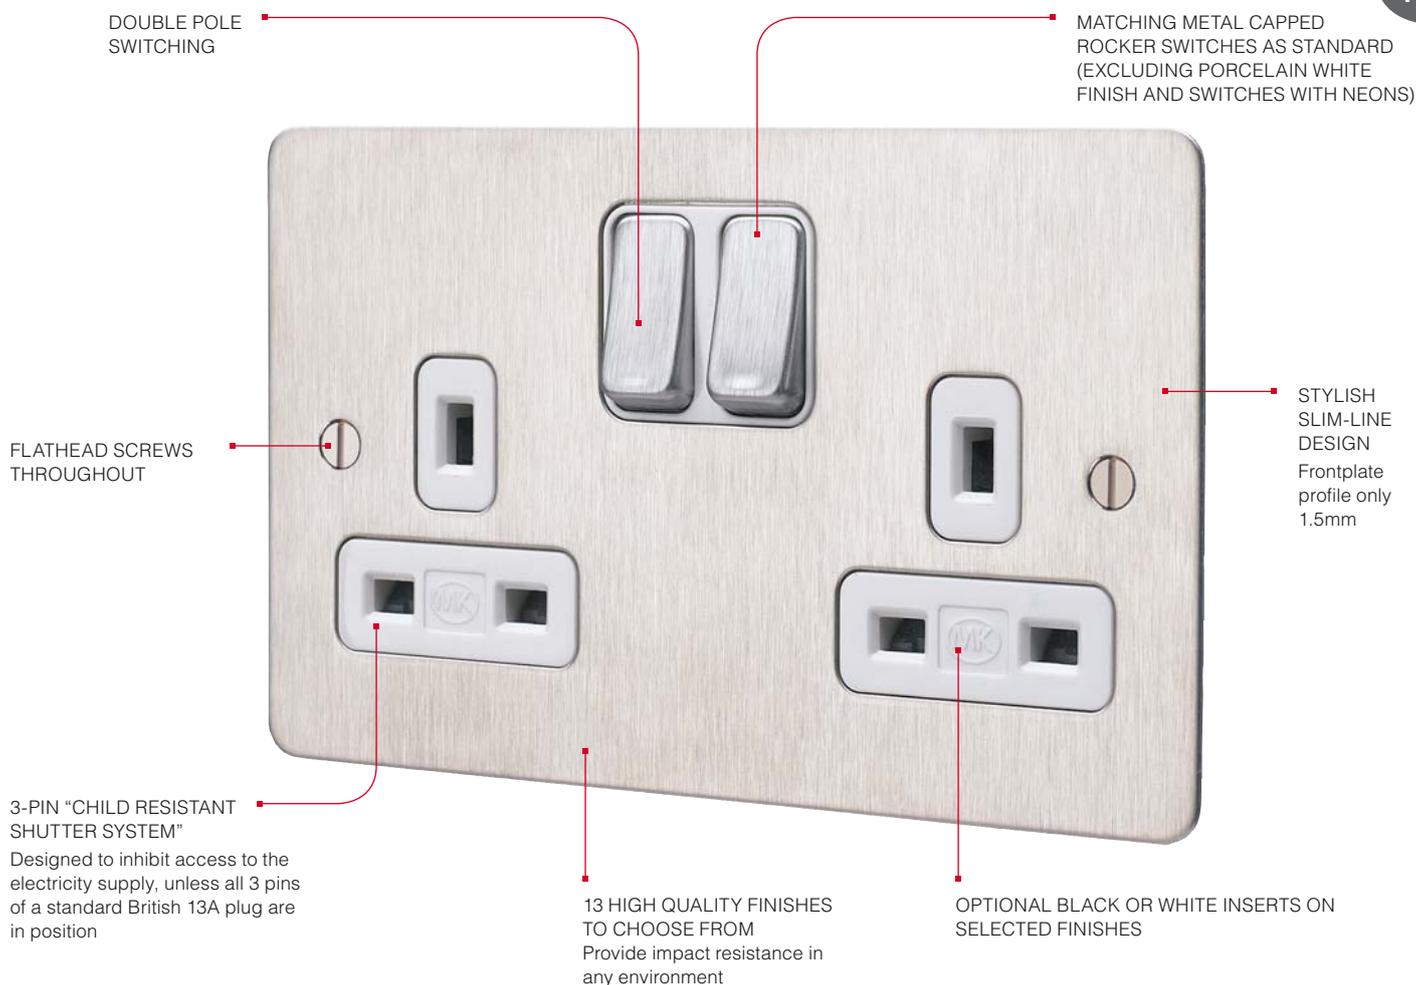

Terminal screws are backed out and captive. Terminals are upwards facing to make installation easier.

Funnel entrance to terminals.

Clear terminal markings for easy identification.

The built-in lock in the Insignia 13A Key Operated Socket ensures that power cannot be turned on or off without the removeable key, making it ideal for communal areas such as hotel lobbies.

Combination plates provide a neat solution to all power, data, TV and satellite outlet requirements.



## Switchsocket Outlets





1 GANG DP  
DUAL EARTH  
13 AMP

1 GANG DP  
WITH NEON  
DUAL EARTH  
13 AMP

NON STANDARD  
1 GANG DP  
CLEAN EARTH  
13 AMP

2 GANG DP  
WITH 2 X USB  
CHARGING PORTS  
DUAL EARTH  
13 AMP

2 GANG DP  
DUAL EARTH  
13 AMP



FINISHES										
BRUSHED STAINLESS STEEL	K14357BSS*	1	K14657BSS*	1	K14268BSS*	1	K14343BSS*	1	K14347BSS*	1
LACQUERED BRUSHED STEEL	K14357LBS*	1	K14657LBS*	1	K14268LBS*	1	K14343LBS*	1	K14347LBS*	1
BRUSHED CHROME	K14357BRC*	1	K14657BRC*	1	K14268BRC*	1	K14343BRC*	1	K14347BRC*	1
POLISHED CHROME	K14357POC*	1	K14657POC*	1	K14268POC*	1	K14343POC*	1	K14347POC*	1
SATIN GOLD	K14357SAG*	1	K14657SAG*	1	K14268SAG*	1	K14343SAG*	1	K14347SAG*	1
PORCELAIN WHITE	K14357WHIW	1	K14657WHIW	1	K14268WHIW	1	K14343WHIW	1	K14347WHIW	1
LUSTROUS IVORY	K14357LIVW	1	K14657LIVW	1	K14268LIVW	1	K14343LIVW	1	K14347LIVW	1
LUSTROUS BLACK	K14357LBKB	1	K14657LBKB	1	K14268LBKB	1	K14343LBKB	1	K14347LBKB	1
POLISHED BRASS	K14357PBR*	1	K14657PBR*	1	K14268PBR*	1	K14343PBR*	1	K14347PBR*	1
TEXTURED IRON	K14357TIRB	1	K14657TIRB	1	K14268TIRB	1	K14343TIRB	1	K14347TIRB	1
DESERT BRONZE	K14357DBZB	1	K14657DBZB	1	K14268DBZB	1	K14343DBZB	1	K14347DBZB	1
ANTIQU BRASS	K14357ABSB	1	K14657ABSB	1	K14268ABSB	1	K14343ABSB	1	K14347ABSB	1
TEXTURED COPPER	K14357TCOB	1	K14657TCOB	1	K14268TCOB	1	K14343TCOB	1	K14347TCOB	1

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW. Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES  
FLUSH 35mm  
866ZIC  
FLUSH 46mm  
877ZIC (for extra wiring space)  
DIMENSIONS  
86 x 86mm  
FIXING CENTRES  
60.3mm  
BS 1363-2:1995

MOUNTING BOXES  
FLUSH 35mm  
866ZIC  
FLUSH 46mm  
877ZIC (for extra wiring space)  
DIMENSIONS  
86 x 86mm  
FIXING CENTRES  
60.3mm  
BS 1363-2:1995  
Neon is only available in white or black insulated rocker.

MOUNTING BOXES  
FLUSH 35mm  
866ZIC  
FLUSH 46mm  
877ZIC (for extra wiring space)  
DIMENSIONS  
86 x 86mm  
FIXING CENTRES  
60.3mm  
BS 1363-2:1995 (where relevant)  
These products are provided with facilities for 'clean earth' connections and are suitable for non-standard plugs with 'T' shaped earth pins.

USB charging sockets, each capable of supporting 2A charge (total of 2A)  
Pattress available for use where existing back box is too shallow, see page 34

MOUNTING BOXES  
FLUSH 35mm  
886ZIC  
FLUSH 47mm  
878ZIC (for extra wiring space)  
DIMENSIONS  
86 x 146mm  
FIXING CENTRES  
120.6mm  
BS 5733:2010

MOUNTING BOXES  
FLUSH 35mm  
886ZIC  
FLUSH 47mm  
878ZIC (for extra wiring space)  
DIMENSIONS  
86 x 146mm  
FIXING CENTRES  
120.6mm  
BS 1363-2:1995

Dual Earth: Fitted with two earth terminals to provide a double earth facility for use when installations require a high integrity protective connection as specified within BS 7671:2008.


2 GANG DP  
CLEAN EARTH  
13 AMP

2 GANG DP  
WITH NEON  
DUAL EARTH  
13 AMP

NON STANDARD  
2 GANG DP  
CLEAN EARTH  
13 AMP

1 GANG DP  
ROUND PIN  
15 AMP

1 GANG DP  
5 AMP



K14345BSS*	1	K14647BSS*	1	K14246BSS*	1	K14383BSS*	1	K14382BSS*	1
K14345LBS*	1	K14647LBS*	1	K14246LBS*	1	K14383LBS*	1	K14382LBS*	1
K14345BRC*	1	K14647BRC*	1	K14246BRC*	1	K14383BRC*	1	K14382BRC*	1
K14345POC*	1	K14647POC*	1	K14246POC*	1	K14383POC*	1	K14382POC*	1
K14345SAG*	1	K14647SAG*	1	K14246SAG*	1	K14383SAG*	1	K14382SAG*	1
K14345WHIW	1	K14647WHIW	1	K14246WHIW	1	K14383WHIW	1	K14382WHIW	1
K14345LIVW	1	K14647LIVW	1	K14246LIVW	1	K14383LIVW	1	K14382LIVW	1
K14345LBKB	1	K14647LBKB	1	K14246LBKB	1	K14383LBKB	1	K14382LBKB	1
K14345PBR*	1	K14647PBR*	1	K14246PBR*	1	K14383PBR*	1	K14382PBR*	1
K14345TIRB	1	K14647TIRB	1	K14246TIRB	1	K14383TIRB	1	K14382TIRB	1
K14345DBZB	1	K14647DBZB	1	K14246DBZB	1	K14383DBZB	1	K14382DBZB	1
K14345ABSB	1	K14647ABSB	1	K14246ABSB	1	K14383ABSB	1	K14382ABSB	1
K14345TCOB	1	K14647TCOB	1	K14246TCOB	1	K14383TCOB	1	K14382TCOB	1

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.  
Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

**MOUNTING BOXES**  
FLUSH 35mm  
886ZIC  
FLUSH 47mm  
878ZIC (for extra wiring space)  
**DIMENSIONS**  
86 x 146mm  
**FIXING CENTRES**  
120.6mm  
BS 1363-2:1995

**MOUNTING BOXES**  
FLUSH 35mm  
886ZIC  
FLUSH 47mm  
878ZIC (for extra wiring space)  
**DIMENSIONS**  
86 x 146mm  
**FIXING CENTRES**  
120.6mm  
BS 1363-2:1995  
Neon is only available in white or black insulated rocker.

**MOUNTING BOXES**  
FLUSH 35mm  
886ZIC  
FLUSH 47mm  
878ZIC (for extra wiring space)  
**DIMENSIONS**  
86 x 146mm  
**FIXING CENTRES**  
120.6mm  
BS 1363-2:1995 (where relevant)  
These products are provided with facilities for 'clean earth' connections, and are suitable for non-standard plugs with T shaped earth pins. Refer to non-standard plugs page 240.

**MOUNTING BOXES**  
FLUSH 35mm  
866ZIC  
FLUSH 46mm  
877ZIC (for extra wiring space)  
**DIMENSIONS**  
86 x 86mm  
**FIXING CENTRES**  
60.3mm  
BS 546:1950

**MOUNTING BOXES**  
FLUSH 35mm  
866ZIC  
FLUSH 46mm  
877ZIC (for extra wiring space)  
**DIMENSIONS**  
86 x 86mm  
**FIXING CENTRES**  
60.3mm  
BS 546:1950

Dual Earth: Fitted with two earth terminals to provide a double earth facility for use when installations require a high integrity protective connection as specified within BS 7671: 2008.

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.  
Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

# Insignia




## Multimedia Plates

4 GANG DP DUAL EARTH  
SWITCHSOCKET,  
EURO 4 MODULE  
100 X 50MM  
13 AMP

2 GANG DP DUAL EARTH  
SWITCHSOCKET,  
EURO 6 MODULE  
50 X 50MM (X3)  
13 AMP

4 GANG DP DUAL EARTH  
SWITCHSOCKET,  
EURO 8 MODULE  
100 X 50MM (X2)  
13 AMP

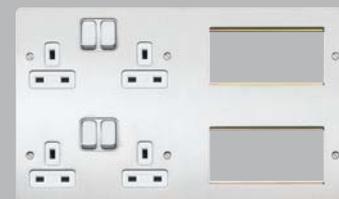

FINISHES						
BRUSHED STAINLESS STEEL	K14200BSS*	1	K14205BSS*	1	K14100BSS*	1
LACQUERED BRUSHED STEEL	K14200LBS*	1	K14205LBS*	1	K14100LBS*	1
BRUSHED CHROME	K14200BRC*	1	K14205BRC*	1	K14100BRC*	1
POLISHED CHROME	K14200POC*	1	K14205POC*	1	K14100POC*	1
SATIN GOLD	K14200SAG*	1	K14205SAG*	1	K14100SAG*	1
PORCELAIN WHITE	K14200WHIW	1	K14205WHIW	1	K14100WHIW	1
LUSTROUS IVORY	K14200LIVW	1	K14205LIVW	1	K14100LIVW	1
LUSTROUS BLACK	K14200LBKB	1	K14205LBKB	1	K14100LBKB	1
POLISHED BRASS	K14200PBR*	1	K14205PBR*	1	K14100PBR*	1
TEXTURED IRON	K14200TIRB	1	K14205TIRB	1	K14100TIRB	1
DESERT BRONZE	K14200DBZB	1	K14205DBZB	1	K14100DBZB	1
ANTIQUE BRASS	K14200ABSB	1	K14205ABSB	1	K14100ABSB	1
TEXTURED COPPER	K14200TCOB	1	K14205TCOB	1	K14100TCOB	1

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW. Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES  
FLUSH 35mm  
K14201  
FLUSH 47mm  
K14202  
DIMENSIONS  
86 x 442.8mm  
BS 1363-2:1995

MOUNTING BOXES  
FLUSH 35mm  
K14206  
FLUSH 47mm  
K14207  
DIMENSIONS  
86 x 407.9mm  
BS 1363-2:1995

MOUNTING BOXES  
FLUSH 35mm  
K14101  
FLUSH 47mm  
K14102  
DIMENSIONS  
173 x 293.6mm  
BS 1363-2:1995

Dual Earth: Fitted with two earth terminals to provide a double earth facility for use when installations require a high integrity protective connection as specified within BS 7671:2008.

Mains operated products and extra low voltage modules must not be installed within the same frontplate aperture. Refer to BS 7671:2008 for details.

## Multimedia Plates


2 GANG DP DUAL EARTH SWITCHSOCKET, EURO 2 MODULE 50 X 50MM (RIGHT SIDE) **13 AMP**

2 GANG DP DUAL EARTH SWITCHSOCKET, EURO 2 MODULE 50 X 50MM (LEFT SIDE) **13 AMP**

2 GANG DP DUAL EARTH SWITCHSOCKET, EURO 4 MODULE 50 X 50MM (X2) **13 AMP**

EURO 8 MODULE 100 X 50MM (X2)

EURO 12 MODULE 150 X 50MM (X2)



K14216BSS*	1	K14217BSS*	1	K14208BSS*	1	K14209BSS*	1	K14210BSS*	1
K14216LBS*	1	K14217LBS*	1	K14208LBS*	1	K14209LBS*	1	K14210LBS*	1
K14216BRC*	1	K14217BRC*	1	K14208BRC*	1	K14209BRC*	1	K14210BRC*	1
K14216POC*	1	K14217POC*	1	K14208POC*	1	K14209POC*	1	K14210POC*	1
K14216SAG*	1	K14217SAG*	1	K14208SAG*	1	K14209SAG*	1	K14210SAG*	1
K14216WHIW	1	K14217WHIW	1	K14208WHIW	1	K14209WHIW	1	K14210WHIW	1
K14216LIVW	1	K14217LIVW	1	K14208LIVW	1	K14209LIVW	1	K14210LIVW	1
K14216LBKB	1	K14217LBKB	1	K14208LBKB	1	K14209LBKB	1	K14210LBKB	1
K14216PBR*	1	K14217PBR*	1	K14208PBR*	1	K14209PBR*	1	K14210PBR*	1
K14216TIRB	1	K14217TIRB	1	K14208TIRB	1	K14209TIRB	1	K14210TIRB	1
K14216DBZB	1	K14217DBZB	1	K14208DBZB	1	K14209DBZB	1	K14210DBZB	1
K14216ABSB	1	K14217ABSB	1	K14208ABSB	1	K14209ABSB	1	K14210ABSB	1
K14216TCOB	1	K14217TCOB	1	K14208TCOB	1	K14209TCOB	1	K14210TCOB	1

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW. Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES  
867ZIC  
DIMENSIONS  
233.3 x 86mm  
BS 1363-2:1995

MOUNTING BOXES  
867ZIC  
DIMENSIONS  
233.3 x 86mm  
BS 1363-2:1995

MOUNTING BOXES  
868ZIC  
DIMENSIONS  
320.6 x 86mm  
BS 1363-2:1995

MOUNTING BOXES  
858ZIC  
DIMENSIONS  
146.4 x 173.3mm  
BS 5733:2010

MOUNTING BOXES  
869ZIC  
DIMENSIONS  
206.3 x 173.3mm  
BS 5733:2010

Dual Earth: Fitted with two earth terminals to provide a double earth facility for use when installations require a high integrity protective connection as specified within BS 7671:2008.

Mains operated products and extra low voltage modules must not be installed within the same frontplate aperture. Refer to BS 7671:2008 for details.



## Socket Outlets

1 GANG  
DUAL EARTH  
13 AMP

2 GANG  
DUAL EARTH  
13 AMP

1 GANG  
2 AMP

1 GANG  
5 AMP



FINISHES								
BRUSHED STAINLESS STEEL	K14780BSS*	1	K14781BSS*	1	K14380BSS*	1	K14381BSS*	1
LACQUERED BRUSHED STEEL	K14780LBS*	1	K14781LBS*	1	K14380LBS*	1	K14381LBS*	1
BRUSHED CHROME	K14780BRC*	1	K14781BRC*	1	K14380BRC*	1	K14381BRC*	1
POLISHED CHROME	K14780POC*	1	K14781POC*	1	K14380POC*	1	K14381POC*	1
SATIN GOLD	K14780SAG*	1	K14781SAG*	1	K14380SAG*	1	K14381SAG*	1
PORCELAIN WHITE	K14780WHIW	1	K14781WHIW	1	K14380WHIW	1	K14381WHIW	1
LUSTROUS IVORY	K14780LIVW	1	K14781LIVW	1	K14380LIVW	1	K14381LIVW	1
LUSTROUS BLACK	K14780LBKB	1	K14781LBKB	1	K14380LBKB	1	K14381LBKB	1
POLISHED BRASS	K14780PBR*	1	K14781PBR*	1	K14380PBR*	1	K14381PBR*	1
TEXTURED IRON	K14780TIRB	1	K14781TIRB	1	K14380TIRB	1	K14381TIRB	1
DESERT BRONZE	K14780DBZB	1	K14781DBZB	1	K14380DBZB	1	K14381DBZB	1
ANTIQUE BRASS	K14780ABSB	1	K14781ABSB	1	K14380ABSB	1	K14381ABSB	1
TEXTURED COPPER	K14780TCOB	1	K14781TCOB	1	K14380TCOB	1	K14381TCOB	1

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW. Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES  
FLUSH 35mm  
866ZIC  
FLUSH 46mm  
877ZIC (for extra wiring space)  
DIMENSIONS  
86 x 86mm  
FIXING CENTRES  
60.3mm  
BS 1363-2:1995

MOUNTING BOXES  
FLUSH 35mm  
886ZIC  
FLUSH 47mm  
878ZIC (for extra wiring space)  
DIMENSIONS  
86 x 146mm  
FIXING CENTRES  
120.6mm  
BS 1363-2:1995

MOUNTING BOXES  
FLUSH 25mm  
861ZIC  
FLUSH 35mm  
866ZIC (for extra wiring space)  
DIMENSIONS  
86 x 86mm  
FIXING CENTRES  
60.3mm  
Earth pin linear operated shutter  
BS 546:1950

MOUNTING BOXES  
FLUSH 35mm  
866ZIC  
FLUSH 46mm  
877ZIC (for extra wiring space)  
DIMENSIONS  
86 x 86mm  
FIXING CENTRES  
60.3mm  
BS 546:1950

Dual Earth: Fitted with two earth terminals to provide a double earth facility for use when installations require a high integrity protective connection as specified within BS 7671:2008.

## Floor Mounted Euro Frames

1 GANG  
EURO 2 MODULE  
50 X 50MM

2 GANG  
EURO 4 MODULE  
100 X 50MM



K14790BSS	1	K14791BSS	1
K14790LBS	1	K14791LBS	1
K14790BRC	1	K14791BRC	1
K14790POC	1	K14791POC	1
K14790SAG	1	K14791SAG	1
K14790WHI	1	K14791WHI	1
K14790LIV	1	K14791LIV	1
K14790LBK	1	K14791LBK	1
K14790PBR	1	K14791PBR	1
K14790TIR	1	K14791TIR	1
K14790DBZ	1	K14791DBZ	1
K14790ABS	1	K14791ABS	1
K14790TCO	1	K14791TCO	1



MOUNTING BOXES  
FLUSH 1 GANG  
866Z/C  
DIMENSIONS  
102 x 86mm  
FIXING CENTRES  
60.3mm  
Boxes must have a minimum  
depth of 35mm.  
BS 5733:2010

MOUNTING BOXES  
FLUSH 2 GANG  
886Z/C  
DIMENSIONS  
102 x 146mm  
FIXING CENTRES  
120.6mm  
Boxes must have a minimum  
depth of 35mm.  
BS 5733:2010



## Connection Units Switched

DP  
13 AMP



DP  
WITH NEON\*\*  
13 AMP



DP  
WITH FLEX OUTLET  
13 AMP



DP  
WITH NEON\*\*  
& FLEX OUTLET  
13 AMP



K14941BSS*	1	K14961BSS*	1	K14931BSS*	1	K14971BSS*	1
K14941LBS*	1	K14961LBS*	1	K14931LBS*	1	K14971LBS*	1
K14941BRC*	1	K14961BRC*	1	K14931BRC*	1	K14971BRC*	1
K14941POC*	1	K14961POC*	1	K14931POC*	1	K14971POC*	1
K14941SAG*	1	K14961SAG*	1	K14931SAG*	1	K14971SAG*	1
K14941WHIW	1	K14961WHIW	1	K14931WHIW	1	K14971WHIW	1
K14941LIVW	1	K14961LIVW	1	K14931LIVW	1	K14971LIVW	1
K14941LBKB	1	K14961LBKB	1	K14931LBKB	1	K14971LBKB	1
K14941PBR*	1	K14961PBR*	1	K14931PBR*	1	K14971PBR*	1
K14941TIRB	1	K14961TIRB	1	K14931TIRB	1	K14971TIRB	1
K14941DBZB	1	K14961DBZB	1	K14931DBZB	1	K14971DBZB	1
K14941ABSB	1	K14961ABSB	1	K14931ABSB	1	K14971ABSB	1
K14941TCOB	1	K14961TCOB	1	K14931TCOB	1	K14971TCOB	1

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.  
Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

**MOUNTING BOXES**  
FLUSH 35mm  
866ZIC  
FLUSH 46mm  
877ZIC (for extra wiring space)  
**DIMENSIONS**  
86 x 86mm  
**FIXING CENTRES**  
60.3mm  
BS 1363-4:1995

**MOUNTING BOXES**  
FLUSH 35mm  
866ZIC  
FLUSH 46mm  
877ZIC (for extra wiring space)  
**DIMENSIONS**  
86 x 86mm  
**FIXING CENTRES**  
60.3mm  
BS 1363-4:1995  
**\*\*NOTE**  
Neon is only available in white or black insulated rocker.

**MOUNTING BOXES**  
FLUSH 35mm  
866ZIC  
FLUSH 46mm  
877ZIC (for extra wiring space)  
**DIMENSIONS**  
86 x 86mm  
**FIXING CENTRES**  
60.3mm  
BS 1363-4:1995

**MOUNTING BOXES**  
FLUSH 35mm  
866ZIC  
FLUSH 46mm  
877ZIC (for extra wiring space)  
**DIMENSIONS**  
86 x 86mm  
**FIXING CENTRES**  
60.3mm  
BS 1363-4:1995  
**\*\*NOTE**  
Neon is only available in white or black insulated rocker.

Matching metal capped fuse carriers are standard on all Insignia Connection Units (except WHI and Neon).

## Connection Units Unswitched

13 AMP

WITH NEON  
13 AMPWITH FLEX OUTLET  
13 AMPWITH NEON &  
FLEX OUTLET  
13 AMP

FINISHES								
BRUSHED STAINLESS STEEL	K14948BSS*	1	K14958BSS*	1	K14989BSS*	1	K14978BSS*	1
LACQUERED BRUSHED STEEL	K14948LBS*	1	K14958LBS*	1	K14989LBS*	1	K14978LBS*	1
BRUSHED CHROME	K14948BRC*	1	K14958BRC*	1	K14989BRC*	1	K14978BRC*	1
POLISHED CHROME	K14948POC*	1	K14958POC*	1	K14989POC*	1	K14978POC*	1
SATIN GOLD	K14948SAG*	1	K14958SAG*	1	K14989SAG*	1	K14978SAG*	1
PORCELAIN WHITE	K14948WHIW	1	K14958WHIW	1	K14989WHIW	1	K14978WHIW	1
LUSTROUS IVORY	K14948LIVW	1	K14958LIVW	1	K14989LIVW	1	K14978LIVW	1
LUSTROUS BLACK	K14948LBKB	1	K14958LBKB	1	K14989LBKB	1	K14978LBKB	1
POLISHED BRASS	K14948PBR*	1	K14958PBR*	1	K14989PBR*	1	K14978PBR*	1
TEXTURED IRON	K14948TIRB	1	K14958TIRB	1	K14989TIRB	1	K14978TIRB	1
DESERT BRONZE	K14948DBZB	1	K14958DBZB	1	K14989DBZB	1	K14978DBZB	1
ANTIQUÉ BRASS	K14948ABSB	1	K14958ABSB	1	K14989ABSB	1	K14978ABSB	1
TEXTURED COPPER	K14948TCOB	1	K14958TCOB	1	K14989TCOB	1	K14978TCOB	1

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW. Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts.

MOUNTING BOXES  
FLUSH 35mm  
866ZIC  
FLUSH 46mm  
877ZIC (for extra wiring space)  
DIMENSIONS  
86 x 86mm  
FIXING CENTRES  
60.3mm  
BS 1363-4:1995

MOUNTING BOXES  
FLUSH 35mm  
866ZIC  
FLUSH 46mm  
877ZIC (for extra wiring space)  
DIMENSIONS  
86 x 86mm  
FIXING CENTRES  
60.3mm  
BS 1363-4:1995

MOUNTING BOXES  
FLUSH 35mm  
866ZIC  
FLUSH 46mm  
877ZIC (for extra wiring space)  
DIMENSIONS  
86 x 86mm  
FIXING CENTRES  
60.3mm  
BS 1363-4:1995

MOUNTING BOXES  
FLUSH 35mm  
866ZIC  
FLUSH 46mm  
877ZIC (for extra wiring space)  
DIMENSIONS  
86 x 86mm  
FIXING CENTRES  
60.3mm  
BS 1363-4:1995


Matching metal capped fuse carriers are standard on all Insignia Connection Units (except WHI and Neon).

## Switches

1 GANG SP  
2 WAY  
20 AMP

2 GANG SP  
2 WAY  
20 AMP

3 GANG SP  
2 WAY  
10 AMP



K14371BSS*	1	K14372BSS*	1	K14373BSS*	1
K14371LBS*	1	K14372LBS*	1	K14373LBS*	1
K14371BRC*	1	K14372BRC*	1	K14373BRC*	1
K14371POC*	1	K14372POC*	1	K14373POC*	1
K14371SAG*	1	K14372SAG*	1	K14373SAG*	1
K14371WHIW	1	K14372WHIW	1	K14373WHIW	1
K14371LIVW	1	K14372LIVW	1	K14373LIVW	1
K14371LBKB	1	K14372LBKB	1	K14373LBKB	1
K14371PBR*	1	K14372PBR*	1	K14373PBR*	1
K14371TIRB	1	K14372TIRB	1	K14373TIRB	1
K14371DBZB	1	K14372DBZB	1	K14373DBZB	1
K14371ABSB	1	K14372ABSB	1	K14373ABSB	1
K14371TCOB	1	K14372TCOB	1	K14373TCOB	1

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.  
Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts.

MOUNTING BOXES  
FLUSH  
861ZIC  
DIMENSIONS  
86 x 86mm  
FIXING CENTRES  
60.3mm  
BS EN 60669-1:1999

MOUNTING BOXES  
FLUSH  
861ZIC  
DIMENSIONS  
86 x 86mm  
FIXING CENTRES  
60.3mm  
BS EN 60669-1:1999

MOUNTING BOXES  
FLUSH  
861ZIC  
DIMENSIONS  
86 x 86mm  
FIXING CENTRES  
60.3mm  
BS EN 60669-1:1999

### High Current Switches

1 GANG DP  
WITH NEON  
32 AMP



1 GANG DP  
WITH NEON  
50 AMP




### Cooker Control Unit

DP SWITCH AND  
13 AMP  
SWITCHSOCKET  
OUTLET WITH NEONS  
45 AMP



### 3 Pole Fan Isolator

10 AMP



### Triple Pole & Neutral Switch

32 AMP



FINISHES										
BRUSHED STAINLESS STEEL	K14305BSS*	1	K14336BSS*	1	K14361BSS*	1	K14859BSS*	1	K14114BSS*	1
LACQUERED BRUSHED STEEL	K14305LBS*	1			K14361LBS*	1	K14859LBS*	1	K14114LBS*	1
BRUSHED CHROME	K14305BRC*	1			K14361BRC*	1	K14859BRC*	1	K14114BRC*	1
POLISHED CHROME	K14305POC*	1			K14361POC*	1	K14859POC*	1	K14114POC*	1
SATIN GOLD	K14305SAG*	1			K14361SAG*	1	K14859SAG*	1	K14114SAG*	1
PORCELAIN WHITE	K14305WHIW	1			K14361WHIW	1	K14859WHIW	1	K14114WHIW	1
LUSTROUS IVORY	K14305LIVW	1			K14361LIVW	1	K14859LIVW	1	K14114LIVW	1
LUSTROUS BLACK	K14305LBKB	1			K14361LBKB	1	K14859LBKB	1	K14114LBKB	1
POLISHED BRASS	K14305PBR*	1			K14361PBR*	1	K14859PBR*	1	K14114PBR*	1
TEXTURED IRON	K14305TIRB	1			K14361TIRB	1	K14859TIRB	1	K14114TIRB	1
DESERT BRONZE	K14305DBZB	1			K14361DBZB	1	K14859DBZB	1	K14114DBZB	1
ANTIQUÉ BRASS	K14305ABSB	1			K14361ABSB	1	K14859ABSB	1	K14114ABSB	1
TEXTURED COPPER	K14305TCOB	1			K14361TCOB	1	K14859TCOB	1	K14114TCOB	1

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW. Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

MOUNTING BOXES  
FLUSH 35mm  
866ZIC  
877ZIC (for extra wiring space)  
DIMENSIONS  
86 x 86mm  
FIXING CENTRES  
60.3mm  
BS EN 60669-1:1999

MOUNTING BOXES  
FLUSH 47mm  
878ZIC  
DIMENSIONS  
86 x 86mm  
FIXING CENTRES  
60.3mm  
BS EN 60669-1:1999

MOUNTING BOXES  
FLUSH 47mm  
878ZIC  
45A DP Main Switch and 13A  
Switchsocket outlet (Up to  
10mm<sup>2</sup> conductor).  
Rotary operated shutter.  
DIMENSIONS  
86 x 146mm  
FIXING CENTRES  
120.6mm  
BS 4177:1992  
To allow adequate wiring  
space, mounting box must be  
installed 6mm to 10mm sub  
flush to the wall surface.

MOUNTING BOXES  
FLUSH 46mm  
877ZIC  
DIMENSIONS  
86 x 186mm  
FIXING CENTRES  
60.3mm  
BS EN 60947-3:1999  
To allow adequate wiring  
space, mounting box must be  
installed 6mm to 10mm sub  
flush to the wall surface.

MOUNTING BOXES:  
FLUSH  
5268ALM (Mounting box  
should be mounted 6 to 10mm  
sub-flush to the wall)  
DIMENSIONS  
203 x 140mm  
TERMINAL CAPACITY  
16mm<sup>2</sup> conductors  
BS EN 60947-3:1999


## Intelligent Dimmers

2 WAY SINGLE  
230V A.C. 50HZ  
60W/VA MIN.  
500W/400VA MAX.

2 WAY DOUBLE  
230V A.C. 50HZ  
60W/VA MIN.  
450W/360VA MAX.  
FOR EACH DIMMER

2 WAY SINGLE  
230V A.C. 50HZ  
40W/VA MIN.  
300W/240VA MAX.

2 WAY DOUBLE  
230V A.C. 50HZ  
40W/VA MIN.  
300W/240VA MAX.  
FOR EACH DIMMER



K14301BSS	1	K14302BSS	1	K14521BSS	1	K14522BSS	1
K14301LBS	1	K14302LBS	1	K14521LBS	1	K14522LBS	1
K14301BRC	1	K14302BRC	1	K14521BRC	1	K14522BRC	1
K14301POC	1	K14302POC	1	K14521POC	1	K14522POC	1
K14301SAG	1	K14302SAG	1	K14521SAG	1	K14522SAG	1
K14301WHI	1	K14302WHI	1	K14521WHI	1	K14522WHI	1
K14301LIV	1	K14302LIV	1	K14521LIV	1	K14522LIV	1
K14301LBK	1	K14302LBK	1	K14521LBK	1	K14522LBK	1
K14301PBR	1	K14302PBR	1	K14521PBR	1	K14522PBR	1
K14301TIR	1	K14302TIR	1	K14521TIR	1	K14522TIR	1
K14301DBZ	1	K14302DBZ	1	K14521DBZ	1	K14522DBZ	1
K14301ABS	1	K14302ABS	1	K14521ABS	1	K14522ABS	1
K14301TCO	1	K14302TCO	1	K14521TCO	1	K14522TCO	1

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.  
Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

**MOUNTING BOXES**  
FLUSH  
866ZIC – 35mm deep min  
**DIMENSIONS**  
86 x 86mm  
**FIXING CENTRES**  
60.3mm

**MOUNTING BOXES**  
FLUSH  
886ZIC – 35mm deep min  
**DIMENSIONS**  
86 x 146mm  
**FIXING CENTRES**  
120.6mm

**MOUNTING BOXES**  
FLUSH  
866ZIC – 35mm deep min  
**DIMENSIONS**  
86 x 86mm  
**FIXING CENTRES**  
60.3mm

**MOUNTING BOXES**  
FLUSH  
866ZIC – 35mm deep min  
**DIMENSIONS**  
86 x 86mm  
**FIXING CENTRES**  
60.3mm

These dimmers employ the latest micro-controller based circuitry to provide electronic soft-start and overload protection. They are suitable for use with good quality electronic or wire-wound transformers. Can also be used with good quality halogen lamps incorporating GU10 bases. Please check with lamp manufacturer to determine suitability.

**NOT SUITABLE FOR FLUORESCENT LOADS.**

Conform to latest standards BS EN 60669-2-1.

All intelligent dimmers have a combined push-on/push-off switch and rotary dimmer control, and are suitable for one or two-way switching.

# Insignia



## Toggle Switch Frontplates

SUPPLIED WITH GRIDS

1 MODULE

2 MODULE

3 MODULE

4 MODULE



FINISHES	1 MODULE		2 MODULE		3 MODULE		4 MODULE	
BRUSHED STAINLESS STEEL	K14431BSS	1	K14432BSS	1	K14433BSS	1	K14434BSS	1
LACQUERED BRUSHED STEEL	K14431LBS	1	K14432LBS	1	K14433LBS	1	K14434LBS	1
BRUSHED CHROME	K14431BRC	1	K14432BRC	1	K14433BRC	1	K14434BRC	1
POLISHED CHROME	K14431POC	1	K14432POC	1	K14433POC	1	K14434POC	1
SATIN GOLD	K14431SAG	1	K14432SAG	1	K14433SAG	1	K14434SAG	1
PORCELAIN WHITE	K14431WHI	1	K14432WHI	1	K14433WHI	1	K14434WHI	1
LUSTROUS IVORY	K14431LIV	1	K14432LIV	1	K14433LIV	1	K14434LIV	1
LUSTROUS BLACK	K14431LBK	1	K14432LBK	1	K14433LBK	1	K14434LBK	1
POLISHED BRASS	K14431PBR	1	K14432PBR	1	K14433PBR	1	K14434PBR	1
TEXTURED IRON	K14431TIR	1	K14432TIR	1	K14433TIR	1	K14434TIR	1
DESERT BRONZE	K14431DBZ	1	K14432DBZ	1	K14433DBZ	1	K14434DBZ	1
ANTIQUÉ BRASS	K14431ABS	1	K14432ABS	1	K14433ABS	1	K14434ABS	1
TEXTURED COPPER	K14431TCO	1	K14432TCO	1	K14433TCO	1	K14434TCO	1

MOUNTING BOX  
FLUSH  
891ALM  
DIMENSIONS  
86 x 86mm  
BS 5733:2010

MOUNTING BOX  
FLUSH  
891ALM  
DIMENSIONS  
86 x 86mm  
BS 5733:2010

MOUNTING BOX  
FLUSH  
892ALM  
DIMENSIONS  
86 x 146mm  
BS 5733:2010

MOUNTING BOX  
FLUSH  
892ALM  
DIMENSIONS  
86 x 146mm  
BS 5733:2010

## Toggle Switch Modules

SP 1 WAY  
20 AMP

SP 2 WAY  
20 AMP

DP 1 WAY  
20 AMP

INTERMEDIATE  
20 AMP

## Grid Plus Modular Frontplates

SUPPLIED WITH GRIDS

1 MODULE

2 MODULE



SP 1 WAY 20 AMP	SP 2 WAY 20 AMP	DP 1 WAY 20 AMP	INTERMEDIATE 20 AMP	1 MODULE	2 MODULE
K14891BSS 1	K14892BSS 1	K14896BSS 1	K14893BSS 1	K14331BSS 1	K14332BSS 1
K14891LBS 1	K14892LBS 1	K14896LBS 1	K14893LBS 1	K14331LBS 1	K14332LBS 1
K14891BRC 1	K14892BRC 1	K14896BRC 1	K14893BRC 1	K14331BRC 1	K14332BRC 1
K14891POC 1	K14892POC 1	K14896POC 1	K14893POC 1	K14331POC 1	K14332POC 1
K14891SAG 1	K14892SAG 1	K14896SAG 1	K14893SAG 1	K14331SAG 1	K14332SAG 1
K14891WHI 1	K14892WHI 1	K14896WHI 1	K14893WHI 1	K14331WHI 1	K14332WHI 1
K14891LIV 1	K14892LIV 1	K14896LIV 1	K14893LIV 1	K14331LIV 1	K14332LIV 1
K14891LBK 1	K14892LBK 1	K14896LBK 1	K14893LBK 1	K14331LBK 1	K14332LBK 1
K14891PBR 1	K14892PBR 1	K14896PBR 1	K14893PBR 1	K14331PBR 1	K14332PBR 1
K14891TIR 1	K14892TIR 1	K14896TIR 1	K14893TIR 1	K14331TIR 1	K14332TIR 1
K14891DBZ 1	K14892DBZ 1	K14896DBZ 1	K14893DBZ 1	K14331DBZ 1	K14332DBZ 1
K14891ABS 1	K14892ABS 1	K14896ABS 1	K14893ABS 1	K14331ABS 1	K14332ABS 1
K14891TCO 1	K14892TCO 1	K14896TCO 1	K14893TCO 1	K14331TCO 1	K14332TCO 1

BS EN 60699-1:1999

BS EN 60699-1:1999

BS EN 60699-1:1999

BS EN 60699-1:1999

MOUNTING BOX  
FLUSH  
891ALM  
DIMENSIONS  
86 x 86mm  
BS 5733:2010

MOUNTING BOX  
FLUSH  
891ALM  
DIMENSIONS  
86 x 86mm  
BS 5733:2010

# Insignia



## Grid Plus Modular Frontplates

SUPPLIED WITH GRIDS



3 MODULE

4 MODULE

6 MODULE

8 MODULE

9 MODULE



FINISHES	3 MODULE		4 MODULE		6 MODULE		8 MODULE		9 MODULE	
BRUSHED STAINLESS STEEL	K14333BSS	1	K14334BSS	1	K14346BSS	1	K14348BSS	1	K14349BSS	1
LACQUERED BRUSHED STEEL	K14333LBS	1	K14334LBS	1	K14346LBS	1	K14348LBS	1	K14349LBS	1
BRUSHED CHROME	K14333BRC	1	K14334BRC	1	K14346BRC	1	K14348BRC	1	K14349BRC	1
POLISHED CHROME	K14333POC	1	K14334POC	1	K14346POC	1	K14348POC	1	K14349POC	1
SATIN GOLD	K14333SAG	1	K14334SAG	1	K14346SAG	1	K14348SAG	1	K14349SAG	1
PORCELAIN WHITE	K14333WHI	1	K14334WHI	1	K14346WHI	1	K14348WHI	1	K14349WHI	1
LUSTROUS IVORY	K14333LIV	1	K14334LIV	1	K14346LIV	1	K14348LIV	1	K14349LIV	1
LUSTROUS BLACK	K14333LBK	1	K14334LBK	1	K14346LBK	1	K14348LBK	1	K14349LBK	1
POLISHED BRASS	K14333PBR	1	K14334PBR	1	K14346PBR	1	K14348PBR	1	K14349PBR	1
TEXTURED IRON	K14333TIR	1	K14334TIR	1	K14346TIR	1	K14348TIR	1	K14349TIR	1
DESERT BRONZE	K14333DBZ	1	K14334DBZ	1	K14346DBZ	1	K14348DBZ	1	K14349DBZ	1
ANTIQUE BRASS	K14333ABS	1	K14334ABS	1	K14346ABS	1	K14348ABS	1	K14349ABS	1
TEXTURED COPPER	K14333TCO	1	K14334TCO	1	K14346TCO	1	K14348TCO	1	K14349TCO	1

MOUNTING BOX  
FLUSH  
892ALM  
DIMENSIONS  
86 x 146mm  
BS 5733:2010

MOUNTING BOX  
FLUSH  
892ALM  
DIMENSIONS  
86 x 146mm  
BS 5733:2010

MOUNTING BOX  
FLUSH  
893ALM  
DIMENSIONS  
146 x 146mm  
BS 5733:2010

MOUNTING BOX  
FLUSH  
893ALM  
DIMENSIONS  
146 x 146mm  
BS 5733:2010

MOUNTING BOX  
FLUSH  
895ALM  
DIMENSIONS  
206 x 146mm  
BS 5733:2010

**Grid Plus  
Modular Frontplates**  
 SUPPLIED WITH GRIDS

12 MODULE

18 MODULE




24 MODULE

1 MODULE  
ARCHITRAVE

**Grid Plus  
Spare Mounting Frames**

1 MODULE  
MOUNTING  
FRAME

2 MODULE  
MOUNTING  
FRAME



K14352BSS	1	K14358BSS	1	K14354BSS	1	K14401BSS	1		
K14352LBS	1	K14358LBS	1	K14354LBS	1	K14401LBS	1		
K14352BRC	1	K14358BRC	1	K14354BRC	1	K14401BRC	1		
K14352POC	1	K14358POC	1	K14354POC	1	K14401POC	1		
K14352SAG	1	K14358SAG	1	K14354SAG	1	K14401SAG	1		
K14352WHI	1	K14358WHI	1	K14354WHI	1	K14401WHI	1		
K14352LIV	1	K14358LIV	1	K14354LIV	1	K14401LIV	1	K14701	10
K14352LBK	1	K14358LBK	1	K14354LBK	1	K14401LBK	1		
K14352PBR	1	K14358PBR	1	K14354PBR	1	K14401PBR	1		
K14352TIR	1	K14358TIR	1	K14354TIR	1	K14401TIR	1		
K14352DBZ	1	K14358DBZ	1	K14354DBZ	1	K14401DBZ	1		
K14352ABS	1	K14358ABS	1	K14354ABS	1	K14401ABS	1		
K14352TCO	1	K14358TCO	1	K14354TCO	1	K14401TCO	1		

MOUNTING BOX  
FLUSH  
895ALM  
DIMENSIONS  
206 x 146mm  
BS 5733:2010

MOUNTING BOX  
FLUSH  
898ALM  
DIMENSIONS  
206 x 206mm  
BS 5733:2010

MOUNTING BOX  
FLUSH  
900ALM  
DIMENSIONS  
207 x 267mm  
BS 5733:2010

MOUNTING BOX  
FLUSH  
3891ZIC  
DIMENSIONS  
38.8 x 91.75  
BS 5733:2010

# Insignia



## Grid Plus Spare Mounting Frames

## Switch Modules

3 MODULE  
MOUNTING FRAME

4 MODULE  
MOUNTING FRAME

6 MODULE  
MOUNTING FRAME

1 MODULE  
ARCHITRAVE  
MOUNTING FRAME

BLANK INSERT



FINISHES	3 MODULE MOUNTING FRAME		4 MODULE MOUNTING FRAME		6 MODULE MOUNTING FRAME		1 MODULE ARCHITRAVE MOUNTING FRAME		BLANK INSERT	
BRUSHED STAINLESS STEEL									K4880BSS*	1
LACQUERED BRUSHED STEEL									K4880LBS*	1
BRUSHED CHROME									K4880BRC*	1
POLISHED CHROME									K4880POC*	1
SATIN GOLD									K4880SAG*	1
MK WHITE (PLASTIC ROCKER)									K4880WHI	10
LUSTROUS IVORY	K14703	10	K14704	10	K14706	10	K14801	10	K4880LIVW	1
LUSTROUS BLACK									K4880LBKB	1
POLISHED BRASS									K4880PBR*	1
TEXTURED IRON									K4880TIRB	1
DESERT BRONZE									K4880DBZB	1
ANTIQUE BRASS									K4880ABSB	1
TEXTURED COPPER									K4880TCOB	1

Will only fit MK Mounting Box 3891ZIC

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.  
Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxLIVW Lustrous Ivory finish with white inserts

BS 5733:2010

## Switch Modules 10 Amp

SP 1 WAY  
10 AMP

DP 1 WAY  
10 AMP

SP 2 WAY  
10 AMP

SP 2 WAY  
RETRACTIVE  
10 AMP

SP 2 WAY  
RED  
RETRACTIVE  
10 AMP

SP 2 WAY  
RETRACTIVE  
MARKED BELL  
SYMBOL  
10 AMP



K4881BSS*	1	K4981BSS*	1	K4882BSS*	1	K4885BSS*	1			
K4881LBS*	1	K4981LBS*	1	K4882LBS*	1	K4885LBS*	1			
K4881BRC*	1	K4981BRC*	1	K4882BRC*	1	K4885BRC*	1			
K4881POC*	1	K4981POC*	1	K4882POC*	1	K4885POC*	1			
K4881SAG*	1	K4981SAG*	1	K4882SAG*	1	K4885SAG*	1			
K4881WHI	10	K4981WHI	10	K4882WHI	10	K4885WHI	10			
K4881LIVW	1	K4981LIVW	1	K4882LIVW	1	K4885LIVW	1	K4885RED K4885REDB	1 1	
K4881LBKB	1	K4981LBKB	1	K4882LBKB	1	K4885LBKB	1		K4885BWHI K4885BBLK	1 1
K4881PBR*	1	K4981PBR*	1	K4882PBR*	1	K4885PBR*	1			
K4881TIRB	1	K4981TIRB	1	K4882TIRB	1	K4885TIRB	1			
K4881DBZB	1	K4981DBZB	1	K4882DBZB	1	K4885DBZB	1			
K4881ABSB	1	K4981ABSB	1	K4882ABSB	1	K4885ABSB	1			
K4881TCOB	1	K4981TCOB	1	K4882TCOB	1	K4885TCOB	1			

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxLIVW Lustrous Ivory finish with white inserts

BS EN 60669-1:1999

BS EN 60669-1:1999

BS EN 60669-1:1999

**NOTE**  
Push switches are not designed for fluorescent loads.  
BS EN 60669-1:1999

**NOTE**  
Push switches are not designed for fluorescent loads.  
BS EN 60669-1:1999

**NOTE**  
Push switches are not designed for fluorescent loads.  
BS EN 60669-1:1999

# Insignia



## Switch Modules 10 Amp

SP 2 WAY  
RETRACTIVE  
MARKED 'PRESS'  
10 AMP

2 WAY  
CENTRE OFF  
RETRACTIVE  
10 AMP

## Switch Modules 20 Amp

SP 1 WAY  
20 AMP

DP  
1 WAY  
PUSH TO MAKE  
20 AMP

DP  
1 WAY  
RED ROCKER  
PUSH TO MAKE  
20 AMP

FINISHES					
BRUSHED STAINLESS STEEL	K4885PWHI K4885PBLK	K4900BSS* 1	K4891BSS* 1	K4910BSS* 1	K4910RED K4910REDB
LACQUERED BRUSHED STEEL		K4900LBS* 1	K4891LBS* 1	K4910LBS* 1	
BRUSHED CHROME		K4900BRC* 1	K4891BRC* 1	K4910BRC* 1	
POLISHED CHROME		K4900POC* 1	K4891POC* 1	K4910POC* 1	
SATIN GOLD		K4900SAG* 1	K4891SAG* 1	K4910SAG* 1	
MK WHITE (PLASTIC ROCKER)		K4900WHI 10	K4891WHI 10	K4910WHI 10	
LUSTROUS IVORY		K4900LIVW 1	K4891LIVW 1	K4910LIVW 1	
LUSTROUS BLACK		K4900LBKB 1	K4891LBKB 1	K4910LBKB 1	
POLISHED BRASS		K4900PBR* 1	K4891PBR* 1	K4910PBR* 1	
TEXTURED IRON		K4900TIRB 1	K4891TIRB 1	K4910TIRB 1	
DESERT BRONZE		K4900DBZB 1	K4891DBZB 1	K4910DBZB 1	
ANTIQUE BRASS		K4900ABSB 1	K4891ABSB 1	K4910ABSB 1	
TEXTURED COPPER		K4900TCOB 1	K4891TCOB 1	K4910TCOB 1	

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.

Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxLIVW Lustrous Ivory finish with white inserts

NOTE  
Push switches are not designed for fluorescent loads.  
BS EN 60669-1:1999

NOTE  
Push switches are not designed for fluorescent loads.  
BS EN 60669-1:1999

BS EN 60669-1:1999

NOTE  
Push switches are not designed for fluorescent loads.  
BS EN 60669-1:1999

NOTE  
Push switches are not designed for fluorescent loads.  
BS EN 60669-1:1999

## Switch Modules 20 Amp

DP 1 WAY PUSH TO BREAK RETRACTIVE <b>20 AMP</b>	DP 1 WAY RED ROCKER PUSH TO BREAK RETRACTIVE <b>20 AMP</b>	SP 2 WAY <b>20 AMP</b>	SP 2 WAY RED ROCKER <b>20 AMP</b>	SP 2 WAY SWITCH WITH INTEGRAL NEON LOCATOR <b>20 AMP</b>	SP 2 WAY AND CENTRE OFF <b>20 AMP</b>
----------------------------------------------------------	------------------------------------------------------------------------	---------------------------	-----------------------------------------	----------------------------------------------------------------------	------------------------------------------------



<b>K4915WHI</b> <b>10</b> <b>K4915BLK</b> <b>10</b>	<b>K4915RED</b> <b>10</b> <b>K4915REDB</b> <b>1</b>	<b>K4892BSS*</b> <b>1</b>	<b>K4892RED</b> <b>10</b> <b>K4892REDB</b> <b>10</b>	<b>K4892LWHI</b> <b>10</b> <b>K4892LBLK</b> <b>1</b>	<b>K4899BSS*</b> <b>1</b>
		<b>K4892LBS*</b> <b>1</b>			<b>K4899LBS*</b> <b>1</b>
		<b>K4892BRC*</b> <b>1</b>			<b>K4899BRC*</b> <b>1</b>
		<b>K4892POC*</b> <b>1</b>			<b>K4899POC*</b> <b>1</b>
		<b>K4892SAG*</b> <b>1</b>			<b>K4899SAG*</b> <b>1</b>
		<b>K4892WHI</b> <b>10</b>			<b>K4899WHI</b> <b>10</b>
		<b>K4892LIVW</b> <b>1</b>			<b>K4899LIVW</b> <b>1</b>
		<b>K4892LBKB</b> <b>1</b>			<b>K4899LBKB</b> <b>1</b>
		<b>K4892PBR*</b> <b>1</b>			<b>K4899PBR*</b> <b>1</b>
		<b>K4892TIRB</b> <b>1</b>			<b>K4899TIRB</b> <b>1</b>
		<b>K4892DBZB</b> <b>1</b>			<b>K4899DBZB</b> <b>1</b>
		<b>K4892ABSB</b> <b>1</b>			<b>K4899ABSB</b> <b>1</b>
<b>K4892TCOB</b> <b>1</b>	<b>K4899TCOB</b> <b>1</b>				

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW. Where there is no asterix, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxLIVW Lustrous Ivory finish with white inserts

**NOTE**  
Push switches are not designed for fluorescent loads.  
BS EN 60669-1:1999

**NOTE**  
Push switches are not designed for fluorescent loads.  
BS EN 60669-1:1999

These switches do NOT have to be derated when used with fluorescent or inductive loads.  
BS EN 60669-1:1999

These switches do NOT have to be derated when used with fluorescent or inductive loads.  
Additional information on printed modules available in Grid Plus Section, pages 175.  
BS EN 60669-1:1999

These switches do NOT have to be derated when used with fluorescent or inductive loads.  
BS EN 60669-1:1999

# Insignia



## Switch Modules

SP 2 WAY  
AND CENTRE  
OFF, RED ROCKER  
20 AMP

INTERMEDIATE  
20 AMP

INTERMEDIATE  
RED ROCKER  
20 AMP

DP  
1 WAY  
20 AMP

DP  
1 WAY  
WITH NEON  
20 AMP



FINISHES					
BRUSHED STAINLESS STEEL		K4893BSS* 1		K4896BSS* 1	
LACQUERED BRUSHED STEEL		K4893LBS* 1		K4896LBS* 1	
BRUSHED CHROME		K4893BRC* 1		K4896BRC* 1	
POLISHED CHROME		K4893POC* 1		K4896POC* 1	
SATIN GOLD		K4893SAG* 1		K4896SAG* 1	
MK WHITE (PLASTIC ROCKER)	K4899RED 10	K4893WHI 1	K4893RED 10	K4896WHI 1	K4896NWHI 1
LUSTROUS IVORY	K4899REDB 10	K4893LIVW 1	K4893REDB 10	K4896LIVW 1	K4896NBLK 1
LUSTROUS BLACK		K4893LBKB 1		K4896LBKB 1	
POLISHED BRASS		K4893PBR* 1		K4896PBR* 1	
TEXTURED IRON		K4893TIRB 1		K4896TIRB 1	
DESERT BRONZE		K4893DBZB 1		K4896DBZB 1	
ANTIQUE BRASS		K4893ABSB 1		K4896ABSB 1	
TEXTURED COPPER		K4893TCOB 1		K4896TCOB 1	

BS EN 60669-1:1999

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW.  
Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxLIVW  
Lustrous Ivory finish with white inserts

## Switch Modules

- |             |            |
|-------------|------------|
| DP          | DP         |
| 1 WAY       | 1 WAY      |
| WITH WINDOW | RED ROCKER |
| 20 AMP      | 20 AMP     |



## Printed Modules with and without Neon



<b>K4896WWHI</b>	<b>10</b>	<b>K4896RED</b>	<b>10</b>
<b>K4896WBLK</b>	<b>10</b>	<b>K4896REDB</b>	<b>10</b>

### K4896 PRINTED MODULE

FOR WHITE ROCKERS, USE THE SUFFIX 'WHI'. FOR BLACK ROCKERS, USE THE SUFFIX 'BLK'. FOR EXAMPLE: K4896BRWHI OR K4896BRBLK

BOILER K4896BR	WASTE DISPOSAL K4896WD	HOB K4896HB
DISHWASHER K4896DW	WASHING MACHINE K4896WM	IMMERSION HEATER K4896IH
COOKER HOOD K4896CH	TUMBLE DRYER K4896TD	PLINTH HEATER K4896PH
FAN K4896FN	WASHER DRYER K4896WDR	WORKTOP LIGHTING K4896WL
FRIDGE K4896Fg	MICROWAVE K4896MW	WINE COOLER K4896WC
FREEZER K4896FZ	HEATER K4896HR	WARMING DRAWER K4896WDA
FRIDGE FREEZER K4896FF	OVEN K4896OV	COFFEE MACHINE K4896CM

### K4896N PRINTED MODULE WITH NEON

FOR WHITE ROCKERS, USE THE SUFFIX 'WHI'. FOR BLACK ROCKERS, USE THE SUFFIX 'BLK'. FOR EXAMPLE: K4896NBRWHI OR K4896NBRBLK

BOILER K4896NBR	WASTE DISPOSAL K4896NWD	HOB K4896NHB
DISHWASHER K4896NDW	WASHING MACHINE K4896NWM	IMMERSION HEATER K4896NIH
COOKER HOOD K4896NCH	TUMBLE DRYER K4896NTD	PLINTH HEATER K4896NPH
FAN K4896NFN	WASHER DRYER K4896NWDR	WORKTOP LIGHTING K4896NWL
FRIDGE K4896NFg	MICROWAVE K4896NMW	WINE COOLER K4896NWC
FREEZER K4896NFZ	HEATER K4896NHR	WARMING DRAWER K4896NWDA
FRIDGE FREEZER K4896NFF	OVEN K4896NOV	COFFEE MACHINE K4896NCM

**NOTE**  
K4896NIH (Immersion Heater with Neon) is not available with black rockers.

BS EN 60669-1:1999

BS EN 60669-1:1999

# Insignia



## Key Switch Modules

INTERMEDIATE  
KEY SWITCH  
20 AMP

SP  
KEY SWITCH  
2 WAY  
20 AMP

SP KEY SWITCH  
2 WAY  
EMERGENCY  
LIGHTING  
20 AMP

DP  
KEY SWITCH  
1 WAY  
20 AMP

DP  
EMERGENCY  
LIGHTING  
20 AMP

SP  
KEY SWITCH  
2 WAY  
RETRACTIVE  
20 AMP



### FINISHES

WHITE	<b>K4894WHI 10</b>	<b>K4898WHI 10</b>	<b>K4898ELWHI 10</b>	<b>K4917WHI 10</b>	<b>K4917ELWHI 10</b>	<b>K4918WHI 10</b>
BLACK	<b>K4894BLK 1</b>	<b>K4898BLK 1</b>	<b>K4898ELBLK 1</b>	<b>K4917BLK 1</b>		<b>K4918BLK 10</b>

BS EN 60669-1:1999  
Key (3405ZIC) is supplied.



## Indicator Modules

200-250V  
NEON

200-250V  
NEON

200-250V  
FLUORESCENT

21-36V  
FILAMENT

21-36V  
FILAMENT

21-36V  
FILAMENT



**K4889RED** 10  
**K4889REDB** 1

**K4889AMB** 10

**K4889GRN** 10

**K4836RED** 10

**K4836AMB** 10

**K4836GRN** 10

BS 5733:2010

BS 5733:2010

BS 5733:2010

BS 5733:2010

BS 5733:2010

BS 5733:2010

Will Operate On Both A.C. And D.C

Not available in other finishes

# Insignia



## Dimmer Switch Modules

1 GANG 40W/  
VA-220W/180VA,  
230VA.C, 50HZ  
2 WAY  
1 MODULE

1 GANG 60W/  
VA-400W/320VA,  
230VA.C, 50HZ  
2 WAY  
2 MODULE

1 GANG  
40-220W/180VA/  
4-70W LED DIMMER  
2 WAY  
1 MODULE

0-10V/1-10V  
FLUORESCENT  
CONTROLLER  
1 MODULE



FINISHES								
BRUSHED STAINLESS STEEL	K4501BSS*LV	1	K4500BSS*LV	1	K4511BSS*LV	1	K4499BSS*	1
LACQUERED BRUSHED STEEL	K4501LBS*LV	1	K4500LBS*LV	1	K4511LBS*LV	1	K4499LBS*	1
BRUSHED CHROME	K4501BRC*LV	1	K4500BRC*LV	1	K4511BRC*LV	1	K4499BRC*	1
POLISHED CHROME	K4501POC*LV	1	K4500POC*LV	1	K4511POC*LV	1	K4499POC*	1
SATIN GOLD	K4501SAG*LV	1	K4500SAG*LV	1	K4511SAG*LV	1	K4499SAG*	1
PORCELAIN WHITE	K4501WHIWL	1	K4500WHIWL	1	K4511WHIWL	1	K4499WHI	1
LUSTROUS IVORY	K4501LIVWL	1	K4500LIVWL	1	K4511LIVWL	1	K4499LIVW	1
LUSTROUS BLACK	K4501LBKBL	1	K4500LBKBL	1	K4511LBKBL	1	K4499LBKB	1
POLISHED BRASS	K4501PBR*LV	1	K4500PBR*LV	1	K4511PBR*LV	1	K4499PBR*	1
TEXTURED IRON	K4501TIRBL	1	K4500TIRBL	1	K4511TIRBL	1	K4499TIRB	1
DESERT BRONZE	K4501DBZBL	1	K4500DBZBL	1	K4511DBZBL	1	K4499DBZB	1
ANTIQU BRASS	K4501ABSBL	1	K4500ABSBL	1	K4511ABSBL	1	K4499ABSB	1
TEXTURED COPPER	K4501TCOBL	1	K4500TCOBL	1	K4511TCOBL	1	K4499TCOB	1

These dimmers incorporate the latest in micro-controller based circuitry to provide electronic soft-start and overload protection. Suitable for use with good quality electronic or wire wound transformers. Can also be used with good quality mains voltage halogen lamps incorporating GU10 bases. Please check with lamp manufacturer to determine suitability. K4500 is only suitable for use in 2, 4 and 8 module grids. They are not suitable for fluorescent lamps.

MK Fluorescent Grid Dimmers are low voltage controllers for connection to 1-10V controllable ballasts.

### NOTE

Refer to technical section for derating factors when more than one unit is used in any one box. Conforms to the latest standard BS EN 60669-2-1.

\* Available with the option of either White or Black inserts. Add Suffix 'W' or 'B' to part number when ordering, E.g. KxxxxBSSW. Where there is no asterisk, the final suffix W = White Insert, B = Black Insert, E.g. KxxxxWHIW = Porcelain White finish with White inserts

When ordering K4500, K4501 & K4511, use the suffix 'LV' right at the end, eg. K4501BSSWL



## Accessory Modules

SINGLE TV CO-AXIAL OUTLET NON-ISOLATED	SINGLE TV CO-AXIAL OUTLET ISOLATED	BUZZER UNIT 200-250V	BUZZER UNIT 21-36V	CORD OUTLET 16 AMP
				
<b>K4520WHI</b> 10 <b>K4896WBLK</b> 10	<b>K4521WHI</b> 10 <b>K4521BLK</b> 10	<b>K4000WHI</b> 10	<b>K4001WHI</b> 10	<b>K4886WHI</b> 10 <b>K4886BLK</b> 10

For direct connection to TV or FM aerial co-axial download. NOT to be used in same enclosure as mains exceeding 50V.  
BS 3041:1977  
IEC 169-2:1965  
BS 5733:2010 where applicable.

For direct connection to TV or FM aerial co-axial download. NOT to be used in same enclosure as mains exceeding 50V.  
BS 3041:1977  
IEC 169-2:1965  
BS 5733:2010 where applicable.

200-250V  
BS 5733:2010

Sound output level  
Av 61 db @ 15 feet.  
BS 5733:2010

Complete with 3 pairs of terminals. The supply terminals are suitable for up to 2 x 2.5mm<sup>2</sup> or 1 x 4mm<sup>2</sup> solid conductors. The load terminals are suitable for one 1.5mm<sup>2</sup> flexible cord. A cord grip is also fitted.  
BS 5733:2010

# Insignia



## Accessory Modules

FUSE UNIT  
13 AMP



FUSE UNIT WITH  
TAMPERPROOF  
SCREW  
13 AMP



## Euro Modular Frontplates

EURO  
1 MODULE  
25 X 50MM



EURO  
2 MODULE  
50 X 50MM



EURO  
4 MODULE  
100 X 50MM



FINISHES								
BRUSHED STAINLESS STEEL			K14181BSS	1	K14182BSS	1	K14184BSS	1
LACQUERED BRUSHED STEEL			K14181LBS	1	K14182LBS	1	K14184LBS	1
BRUSHED CHROME			K14181BRC	1	K14182BRC	1	K14184BRC	1
POLISHED CHROME			K14181POC	1	K14182POC	1	K14184POC	1
SATIN GOLD			K14181SAG	1	K14182SAG	1	K14184SAG	1
PORCELAIN WHITE	K4890WHI	10	K14181WHI	1	K14182WHI	1	K14184WHI	1
LUSTROUS IVORY	K4890BLK	10	K14181LIV	1	K14182LIV	1	K14184LIV	1
LUSTROUS BLACK			K14181LBK	1	K14182LBK	1	K14184LBK	1
POLISHED BRASS			K14181PBR	1	K14182PBR	1	K14184PBR	1
TEXTURED IRON			K14181TIR	1	K14182TIR	1	K14184TIR	1
DESERT BRONZE			K14181DBZ	1	K14182DBZ	1	K14184DBZ	1
ANTIQUÉ BRASS			K14181ABS	1	K14182ABS	1	K14184ABS	1
TEXTURED COPPER			K14181TCO	1	K14182TCO	1	K14184TCO	1

Fuse carrier comes with 13A cartridge fuse link to BS 1362. BS 5733:2010

Key 3405ZIC supplied  
Fuse carrier comes with 13A cartridge fuse link to BS 1362. BS 5733:2010

**MOUNTING BOXES**  
Suitable for flush boxes to BS 4662:2006 and surface boxes to BS 5733:2010  
Refer to appropriate module for minimum box depth.

**FIXING CENTRES**  
60.3mm  
BS 5733:2010 where applicable.  
Note: No grid required, modules just clip into place.

**MOUNTING BOXES**  
Suitable for flush boxes to BS 4662:2006 and surface boxes to BS 5733:2010  
Refer to appropriate module for minimum box depth.

**FIXING CENTRES**  
60.3mm  
BS 5733:2010 where applicable.  
Note: No grid required, modules just clip into place.

**MOUNTING BOXES**  
Suitable for flush boxes to BS 4662:2006 and surface boxes to BS 5733:2010  
Refer to appropriate module for minimum box depth.

**FIXING CENTRES**  
120.6mm  
BS 5733:2010 where applicable.  
Note: No grid required, modules just clip into place.

## Euro Power Modules


UK  
250V  
2 MODULE  
50 X 50MM  
13 AMP

GERMAN  
2P+E 250V  
SHUTTERED  
2 MODULE (NON UK)  
16 AMP

AMERICAN  
127V SHUTTERED  
2 MODULE  
50 X 50MM (NON UK)  
15 AMP

UK  
250V SHUTTERED  
2 MODULE  
50 X 50MM  
5 AMP

FRENCH/BELGIAN  
2P+E  
250V SHUTTERED  
2 MODULE  
50 X 50MM (NON UK)  
16 AMP



**K5830SAWHI** 10  
**K5830BLK** 10

**K5831WHI** 10  
**K5831BLK** 10

**K5832WHI** 10  
**K5832BLK** 10

**K5833WHI** 10  
**K5833BLK** 10

**K5834WHI** 10  
**K5834BLK** 10

**MOUNTING BOX**  
35mm minimum  
46mm (for extra wiring space).  
**DIMENSIONS**  
50 x 50mm  
BS 1363 Part 2:1995

**MOUNTING BOX**  
46mm  
**DIMENSIONS**  
50 x 50mm  
IEC 60884-1:2006

**MOUNTING BOX**  
35mm  
46mm (for extra wiring space)  
**DIMENSIONS**  
50 x 50mm  
SASO 2204:2003

**MOUNTING BOX**  
35mm minimum  
46mm (for extra wiring space).  
**DIMENSIONS**  
50 x 50mm  
BS 546:1950

**MOUNTING BOX**  
46mm  
**DIMENSIONS**  
50 x 50mm  
NF C61-314

Mains operated products and extra low voltage modules must not be installed within the same frontplate.  
Refer to BS 7671:2008 for details.

# Insignia



## Euro Power Modules

USB CHARGING  
2 MODULE  
50 X 50MM

## Euro Datacom Modules

RJ11/12  
1 MODULE  
25 X 50MM

RJ45  
CAT 6  
1 MODULE  
25 X 50MM

RJ45  
CAT 6  
SCREENED  
1 MODULE  
25 X 50MM

RJ45  
CAT 6  
ANGLED  
1 MODULE  
25 X 50MM

FINISHES					
WHITE	<b>K5837WHI</b> 1	<b>K5887SAWHI</b> 5	<b>K5846SAWHI</b> 5	<b>K5846SWHI</b> 5	<b>K5864WHI</b> 5
BLACK	<b>K5837BLK</b> 1	<b>K5887BLK</b> 5	<b>K5846BLK</b> 5	<b>K5846SBLK</b> 5	

USB charging sockets, each capable of supporting 2A charge (total of 2A)

**K5837 MOUNTING BOX**  
Minimum Box depth 35mm  
46mm for extra wiring space  
IEC 60950-1  
IEC 61000-6-1/3

Suitable for both RJ11 and RJ12 jacks  
RJ11; 4 wire  
RJ12; 6 wire

**MOUNTING BOXES**  
Minimum Box depth 35mm  
FCC68  
EN 41003

Cat 6 performance.  
Suitable for both 568A and 568B wiring schemes.

**MOUNTING BOXES**  
Minimum Box Depth 35mm  
ISO/IEC 11801  
EN 50173  
TIA 568  
EN 41003

Cat 6 performance.  
Suitable for both 568A and 568B wiring schemes.

**MOUNTING BOXES**  
Minimum Box Depth 35mm  
ISO/IEC 11801  
EN 50173  
TIA 568  
EN 41003

Cat 6 performance.  
Suitable for both 568A and 568B wiring schemes.

**MOUNTING BOXES**  
Minimum Box Depth 35mm  
ISO/IEC 11801  
EN 50173  
TIA 568  
EN 41003

Mains operated products and extra low voltage modules must not be installed within the same frontplate.  
Refer to BS 7671:2008 for details.

RJ45  
CAT 5e  
ANGLED  
1 MODULE  
25 X 50MM

RJ45  
CAT 5e  
1 MODULE  
25 X 50MM

TELEPHONE  
MASTER  
1 MODULE  
25 X 50MM

TELEPHONE  
SECONDARY  
1 MODULE  
25 X 50MM

BNC 50Ω  
1 MODULE  
25 X 50MM



<b>K5844WHI</b>	<b>5</b>	<b>K5845WHI</b>	<b>5</b>	<b>K5820WHI</b>	<b>5</b>	<b>K5821WHI</b>	<b>5</b>	<b>K5801WHI</b>	<b>5</b>
		<b>K5845BLK</b>	<b>5</b>	<b>K5820BLK</b>	<b>5</b>	<b>K5821BLK</b>	<b>5</b>		

Enhanced Cat 5 performance.  
Suitable for both 568A and 568B  
wiring schemes.

**MOUNTING BOXES**  
Minimum box depth  
35mm standard  
ISO/IEC 11801  
EN 50173  
TIA 568  
EN 41003

Enhanced Cat 5 performance.  
Suitable for both 568A and 568B  
wiring schemes.

**MOUNTING BOXES**  
Minimum box depth 35mm  
standard  
ISO/IEC 11801  
EN 50173  
TIA 568  
EN 41003

**MOUNTING BOXES**  
Minimum depth 35mm  
BS 6312-2

**MOUNTING BOXES**  
Minimum depth 35mm  
BS 6312-2

50 Ohm crimp connector suitable  
for use with RG58, URM43,  
URM76 and Beldon 9907 type  
co-axial cables.

**MOUNTING BOXES**  
Minimum box depth 35mm

Mains operated products and extra low voltage modules must not be installed within the same frontplate.  
Refer to BS 7671:2008 for details.

### Euro Multimedia Modules

SINGLE OUTLET  
(IEC MALE)  
1 MODULE  
25 X 50MM

SINGLE OUTLET  
(IEC FEMALE)  
1 MODULE  
25 X 50MM

SINGLE F-TYPE  
SATELLITE  
SOCKET  
1 MODULE  
25 X 50MM



FINISHES				
WHITE	<b>K5850WHI</b>	<b>5</b>	<b>K5851WHI</b>	<b>5</b>
BLACK	<b>K5850BLK</b>	<b>5</b>	<b>K5851BLK</b>	<b>5</b>

Fully screened non isolated TV outlets containing a combination of single, TV/FM Diplexer, TV/FM/SAT Triplexer and BT secondary telephone outlets for use within digital TV systems and interactive TV services.

Single outlets for connection to a single TV, FM or Satellite co-axial aerial lead.

#### MOUNTING BOXES

Minimum Box Depth 47mm

BS 3041:1997, IEC 169-2:1965, BS EN 50083 & BS 5733:2010 where applicable.

These products are fully compatible with Labgear TV distribution systems and are approved for use in "Sky Homes" and "Homes On" specifications.

Mains operated products and extra low voltage modules must not be installed within the same frontplate.  
Refer to BS 7671:2008 for details.

## Euro Multimedia Modules

**FEMALE HDMI OUTLET**  
2 MODULE  
50 X 50MM



**AUDIO BINDING  
POST FOR SINGLE  
LOUD SPEAKER**  
1 MODULE  
25 X 50MM



**RCA TO SCREW  
TERMINATION SET**  
1 RED AND 1 BLACK  
1 MODULE  
25 X 50MM



<b>K5807WHI</b>	<b>5</b>	<b>K5805WHI</b>	<b>5</b>	<b>K5806WHI</b>	<b>5</b>
<b>K5807BLK</b>	<b>5</b>	<b>K5805BLK</b>	<b>5</b>	<b>K5806BLK</b>	<b>5</b>

K5807 Female HDMI Outlet is HDMI 1.1, 1.2, 1.3 and 1.4b compatible, HDCP compliant.

**DATA RATE**

Up to 2.25 Gbps

**SCAN**

Up to 1080p/1920x1200

**INPUT CONNECTOR**

1 x HDMI Female (Type A)

**OUTPUT CONNECTOR**

1 x HDMI Female (Type A)

Supports high resolution input:

PC: VGA, SVGA,

SXVGA (1280x1024) and UXGA (1600x1200, 1920x1200)

HDTV: 480p, 720p, 1080i and 1080p

HDMI input cable should be no larger than 20m

**DIMENSIONS**

50 x 25 x 28mm

**DIMENSIONS**

50 x 25 x 28mm

These products are fully compatible with Labgear TV distribution systems and are approved for use in "Sky Homes" and "Homes On" specifications.

**Mains operated products and extra low voltage modules must not be installed within the same frontplate. Refer to BS 7671:2008 for details.**

# Insignia



## Euro Blank Modules

2 MODULE  
50 X 50MM

1 MODULE  
25 X 50MM

1/2 MODULE  
12.5 X 50MM



**FINISHES**

BRUSHED STAINLESS STEEL

LACQUERED BRUSHED STEEL

BRUSHED CHROME

POLISHED CHROME

SATIN GOLD

PORCELAIN WHITE

LUSTROUS IVORY

LUSTROUS BLACK

POLISHED BRASS

TEXTURED IRON

DESERT BRONZE

ANTIQUÉ BRASS

TEXTURED COPPER

**K180WHI**  
**K180BLK**

**10**  
**10**

**K188WHI**  
**K188BLK**

**10**  
**10**

**K186WHI**  
**K186BLK**

**10**  
**10**

BS 5733:2010 where applicable

BS 5733:2010 where applicable

BS 5733:2010 where applicable



# Insignia



## LJU6C Datacom Blanks

LJU6C  
1 MODULE

## Blank Plates

1 GANG

2 GANG

FINISHES			
BRUSHED STAINLESS STEEL	K170WHI K170BLK	10 10	K14330BSS 1 K14329BSS 1
LACQUERED BRUSHED STEEL			K14330LBS 1 K14329LBS 1
BRUSHED CHROME			K14330BRC 1 K14329BRC 1
POLISHED CHROME			K14330POC 1 K14329POC 1
SATIN GOLD			K14330SAG 1 K14329SAG 1
PORCELAIN WHITE			K14330WHI 1 K14329WHI 1
LUSTROUS IVORY			K14330LIV 1 K14329LIV 1
LUSTROUS BLACK			K14330LBK 1 K14329LBK 1
POLISHED BRASS			K14330PBR 1 K14329PBR 1
TEXTURED IRON			K14330TIR 1 K14329TIR 1
DESERT BRONZE			K14330DBZ 1 K14329DBZ 1
ANTIQUÉ BRASS			K14330ABS 1 K14329ABS 1
TEXTURED COPPER			K14330TCO 1 K14329TCO 1

BS 5733:2010 where appropriate

MOUNTING BOXES  
FLUSH  
866ZIC  
DIMENSIONS:  
86 x 86mm  
FIXING CENTRES  
1 gang: 60.3mm  
BS 5733:2010

MOUNTING BOXES  
FLUSH  
866ZIC  
DIMENSIONS  
86 x 146mm  
FIXING CENTRES  
2 gang: 120.6mm  
BS 5733:2010

